


SINOx[®]

Emissions Control

ARGILLON 

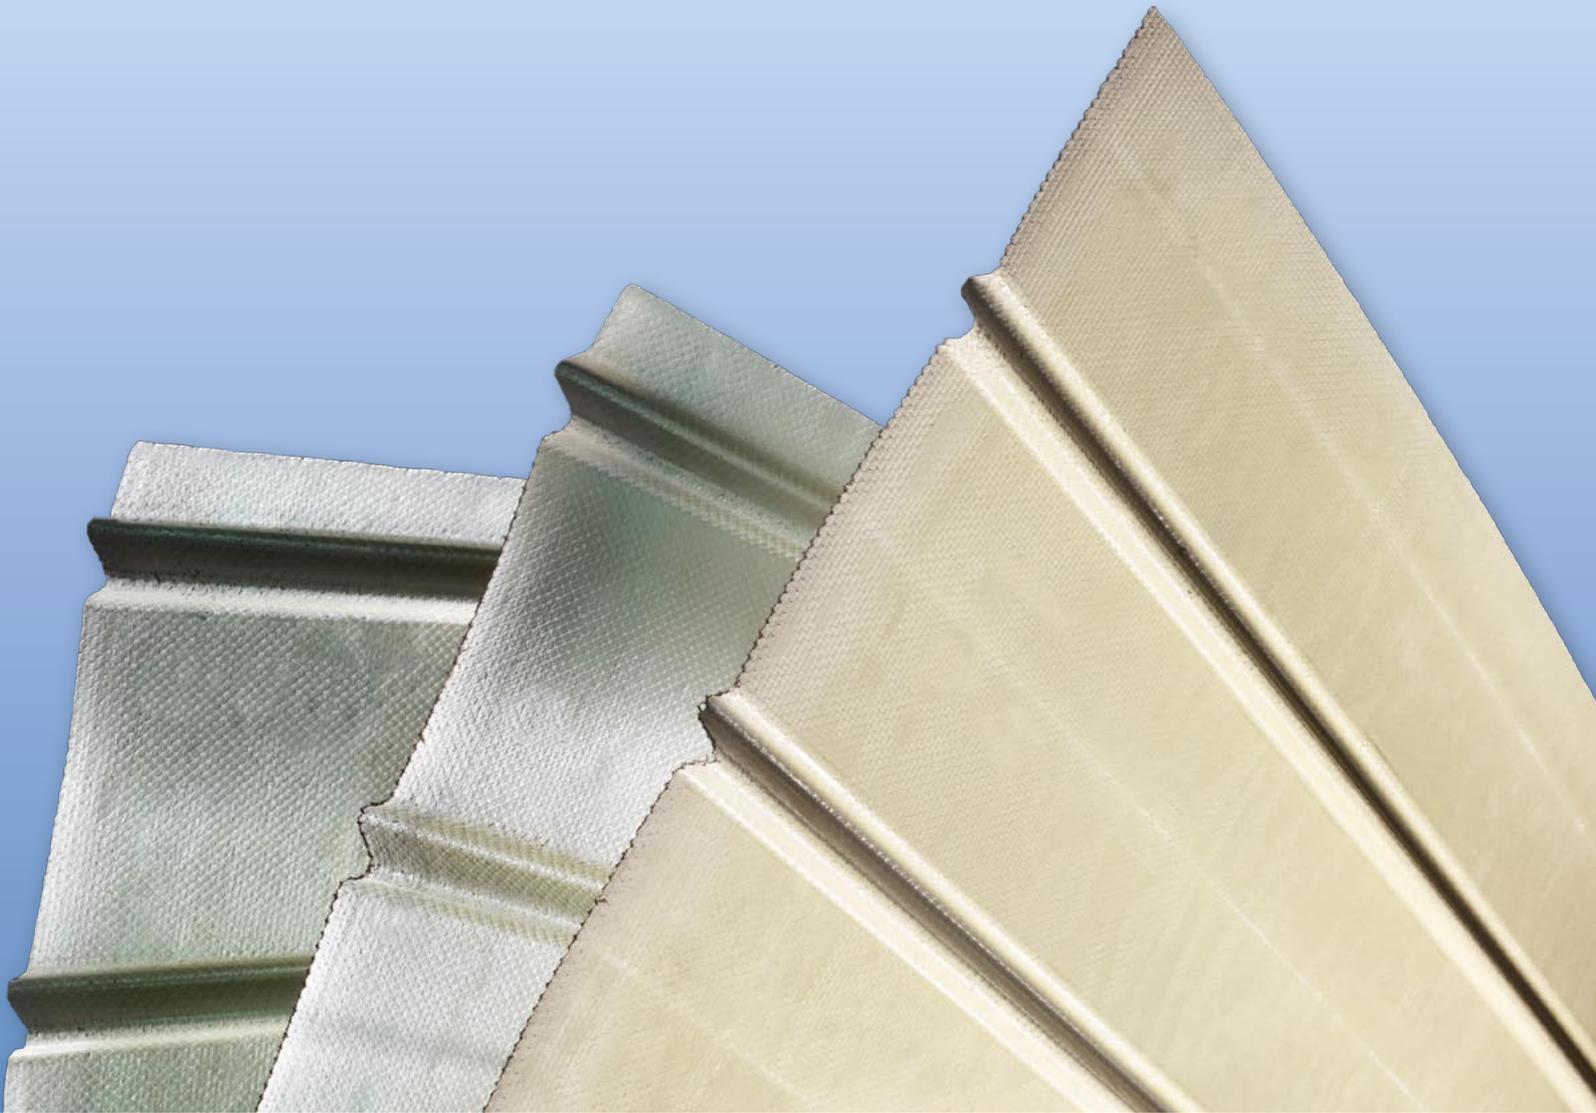

>>>> SINOx[®] Plate Catalysts

Argillon exhaust gas treatment catalysts convert pollutants into substances which are environmentally benign (e.g. water vapor, nitrogen). At our manufacturing facility in Redwitz, Germany, which also produces our SINOx[®] honeycomb and oxidation catalysts, we fabricate plate catalysts for NOx removal. These catalysts operate with a high cleaning efficiency and reliably reduce the concentration of nitrogen oxides to below Air Pollution Control Code limits.

SINOx[®] plate catalysts consist of a catalytically active material based on titanium dioxide, vanadium oxides and tungsten oxides or molybdenum oxides rolled on a stainless steel mesh. The catalyst plates are integrated into element frames which are installed in a steel module.

The typical application for SINOx[®] plate catalysts is the abatement of NOx under high-dust conditions. Examples are plants firing coal, heavy fuel oil and residual oil from refineries as well as industrial high-dust processes and wood fired boilers.



Features and Benefits

>>> of SINOx® Plate Catalysts

SINOx® plate catalysts have some advantages compared to conventional honeycomb catalysts. Plate catalysts show minimal dust depositions even under extreme high-dust conditions and also exhibit a high erosion resistance. Additional benefits include low SO₂ conversion rates and low pressure drop. These result in a long service life with high NOx removal rates and minimal operating costs.

The most appropriate catalyst type and the required catalyst volume will be individually designed and optimized depending on the exhaust gas conditions. By varying the number of plates per element frame, the pitch can be optimized over a wide range. The plate height will vary depending on operating conditions.

The exhaust gas temperature plays an important role in the choice of catalyst. In a typical high-dust temperature range between 280°C and 450°C (535°F and 845°F), SINOx® plate catalysts achieve high NOx removal efficiency.



Please contact us with
your next opportunity.

Argillon GmbH
SINOx® Emissions Control
Power Plant Applications
Bahnhofstrasse 43
96257 Redwitz
Germany
Phone +49 (0) 9574 81 843
Fax +49 (0) 9574 81 628
sinox-catalysts@argillon.com

Argillon LLC
5895 Shiloh Road, Suite 101
Alpharetta, GA 30005
USA
Phone +1 678 341 7520
Fax +1 678 341 7509
usascr@argillon.com

www.sinox.com